



MS7120 Orbit® is an aggressive, omnidirectional presentation/handheld laser bar code scanner. Orbit is lightweight, rugged, small in size and BIG in performance.

MS7120 Orbit®

Features

- Fully automatic scan operation
- Decodes RSS-14, RSS Limited and RSS Expanded bar codes
- User-replaceable, single cable interface to host
- Mountable to a wall or under check-writing stands
- Customize the depth-of-field for tight scanning environments
- Custom edit the bar code data to meet the requirements of the application
- Multiple beeper tones
- OPOS and JPOS system compatible

Metrologic's MS7120 Orbit is an aggressive, omnidirectional presentation laser bar code scanner. Designed for applications where counter space is at a premium, Orbit is the ideal presentation scanner for retail, convenience, liquor and specialty stores. In addition, Orbit's unique, contoured shape allows it to be picked up and used as a hand-held when scanning large or bulky items. Lightweight and rugged, Orbit is small in size but BIG in performance.

Engineered with a large, easy-to-find sweet spot, Orbit increases first pass read rate for maximum productivity. The scanning head can be tilted

vertically a full 30° for added flexibility when scanning various sized objects. Orbit has a patented 20-line omnidirectional scan pattern that produces 1,200 scan lines per second. These features increase the scanning throughput, without increasing Orbit's size.

Orbit is engineered for easy configuration and utilizes user-replaceable cables, in order to meet the multiple application needs across the many markets it serves. Data editing or "parsing" is also a standard feature. Parsing enables the encoded information to be manipulated to meet the host system's requirements.



MS7120 Orbit®

OPERATIONAL

| | | |
|------------------------------------|--|------------------------------------|
| Light Source | Visible Laser Diode 650 nm \pm 5 nm | |
| Laser Power | 0.663 mW (peak) | |
| Depth of Scan Field (programmable) | 0 mm - 215 mm (0" - 8.5") for 0.33 mm (13 mil) bar codes | |
| Width of Scan Field | 60 mm (2.4") @ face; 105 mm (4.1") @ 216 mm (8.5") | |
| Scan Speed | 1200 scan lines per second | |
| Scan Pattern | 5 fields of 4 parallel lines (omnidirectional) | |
| Number of Scan Lines | 20 | |
| Minimum Bar Width | 0.13 mm (5.2 mil) | |
| Decode Capability | Autodiscriminates all standard bar codes, including RSS; for other symbologies call Metrologic | |
| System Interfaces | PC Keyboard Wedge, RS232, OCIA, Light Pen Emulation, IBM 468X/469X, Stand Alone Keyboard, USB (low speed and full speed) | |
| Print Contrast | 35% minimum reflectance difference | |
| Number Characters Read | Up to 80 data characters | |
| Roll, Pitch, Yaw | 360°, 60°, 60° | |
| Beeper Operation | 7 tones or no beep | |
| Indicators (LED) | Green* = laser on, ready to scan | * Indicator colors can be reversed |
| | Red* = good read | |

MECHANICAL

| | |
|--------------|--|
| Height | 150 mm (5.9") |
| Depth | 105 mm (4.1") |
| Width - Orb | 80 mm (3.1") |
| Width - Base | 102 mm (4.0") |
| Weight | 380 g (13.4 oz) |
| Termination | 10 pin modular RJ45 |
| Cable | Standard 2.1 m (7') straight; optional 2.7 m (9') coiled; for other cables call Metrologic |
| Tilt - Orb | 30° vertical |


ELECTRICAL

| | |
|-------------------|--|
| Input Voltage | 5 VDC \pm 0.25 V |
| Power | 1.1 W typical @ 5 VDC |
| Operating Current | 220 mA |
| DC Transformers | Class 2; 5.2 V @ 650 mA |
| Laser Class | CDRH: Class IIa; EN60825-1:1994/A11:1996 Class 1 |
| EMC | Class B: FCC Part 15, ICES-003, European Union EMC Directive |


| | |
|-----------------------|--|
| Operating Temperature | 0°C to 40°C (32°F to 104°F) |
| Storage Temperature | -40°C to 60°C (-40°F to 140°F) |
| Humidity | 5% to 95% relative humidity, non-condensing |
| Light Levels | Up to 4842 Lux (450 footcandles) |
| Shock | Designed to withstand 1.2 m (4.0') drops |
| Contaminants | Sealed to resist airborne particulate contaminants |
| Ventilation | None required |

Scan Area


Optimal Low Density (default)
- user configurable -

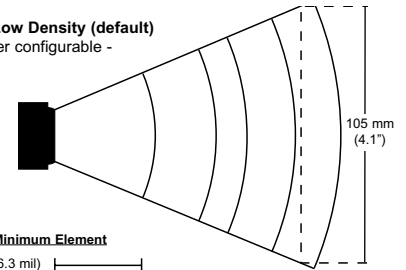


Bar Code Minimum Element

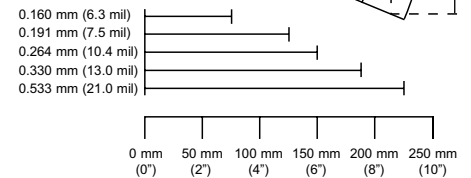


Optimal High Density
- user configurable -

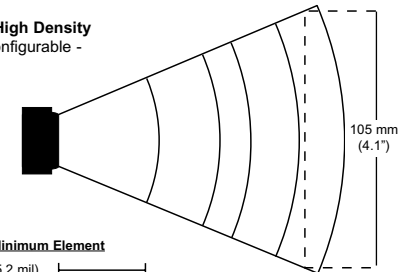

Bar Code Minimum Element

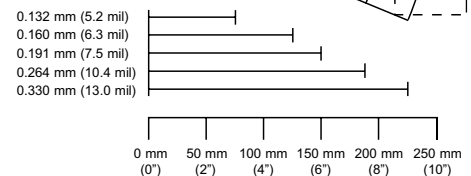

Dimensions

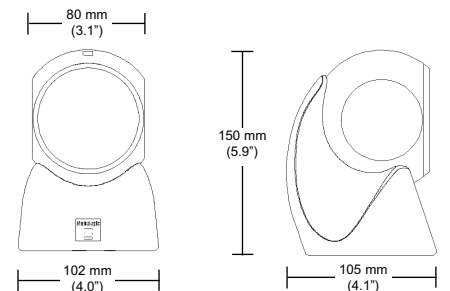

Specifications subject to change without notice.
Printed U.S.A., Copyright November 2002
Metrologic, All rights reserved.



DS7120

Orbit is available in the following colors



Pearl White



Light Grey



Black

Sample only, actual colors may vary



EUROPEAN REGIONAL OFFICES

Eastern Europe, Middle East & Africa
Metrologic Instruments GmbH
Tel: +49 (0) 89 89 019 222
Fax: +49 (0) 89 89 019 173
Email: info@east.metrologic.com
www.europe.metrologic.com

France
Metrologic Eria France SA
Tel: +33 (0) 1 48.63.78.78
Fax: +33 (0) 1 48.63.24.94
Email: info@fr.metrologic.com
www.europe.metrologic.com

Germany
Metrologic Instruments GmbH
Tel: +49 (0) 89 89 019 0
Fax: +49 (0) 89 89 019 200
Email: info@de.metrologic.com
www.metrologic-instruments.de

Italy
Metrologic Instruments Italia Srl
Tel: +39 0 51 6511978
Tel: +39 0 51 6521337
Fax: +39 0 51 6521337
Email: info@it.metrologic.com
www.metrologic.it

Spain
Metrologic Eria Ibérica SL
Tel: +34 91 327 24 00
Fax: +34 91 327 38 29
Email: info@es.metrologic.com
www.metrologic.es

United Kingdom
Metrologic Instruments UK
Tel: +44 (0)1256 365900
Fax: +44 (0)1256 365955
Email: info@uk.metrologic.com
www.metrologic.co.uk

USA
Metrologic Instruments, Inc.
Tel: 1-800-ID-METRO
Fax: 1-856-228-6673
Email: info@metrologic.com

South America
Metrologic South America
Tel: 5511-5505-6568
Fax: 5511-5505-1681
Email: info@sa.metrologic.com

Brazil (only)
Metrologic do Brasil Ltda.
Tel: 5511-5505-2396
Fax: 5511-5507-2301
Email: info@br.metrologic.com

Asia
Metrologic Asia (Pte) Ltd.
Tel: 65-842-7155
Fax: 886-3-2888292
Email: info@sg.metrologic.com

China (only)
Metro (Suzhou) Technologies Co.Ltd
Tel: 86-512-2572511
Fax: 86-512-2571517
Email: info@cn.metrologic.com

Metrologic
IDENTIFYING SOLUTIONS