



# euroscreen® Frame Vision Light

## SCREEN SURFACES



### FlexWhite

Pliable matt white front surface, superb colour rendition, Full HD compliant. Gain 1.0.



### ReAct II

Pliable silver grey front surface, enhances colour contrast in bright light, Full HD compliant. Peak gain 1.1.




### FlexRear

Neutral grey rear projection surface, allows placement of projector behind the screen. Gain 2.5.


## PROJECTION FORMATS




The format of the viewing area is 4:3.



The format of the viewing area is 16:10.



The format of the viewing area is 16:9.



The format of the viewing area is 2.35:1.

## OPTIONS




### Vel-Tex®

For total control of the ambient light. Reducing the reflections to a minimum.

Frame Vision Light is a high quality framed screen with a tensioning system that puts equal tension on each part of the viewing surface, making it perfectly smooth. The surface is stretched on a 5cm aluminium frame that features an attractive black border, giving the screen a theatre-like appearance. As an option, Vel-Tex® can be added to the frame, for total control of the ambient light and reducing the reflections to an absolute minimum. Frame Vision Light is very quick and easy to assemble.


## SCREEN DIMENSIONS

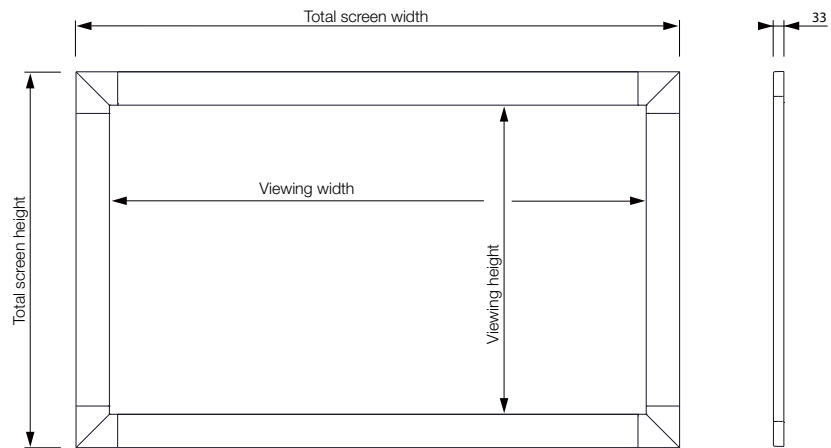


$$\text{Total frame width} = \text{Viewing width} + 100\text{mm}$$

$$\text{Total frame height} = \text{Viewing height} + 100\text{mm}$$


## DETAILS



Plastic Corner  
3D view




Extrusion  
3D view




Extrusion  
Side view

## CONSTRUCTION

How to tension the screen surface

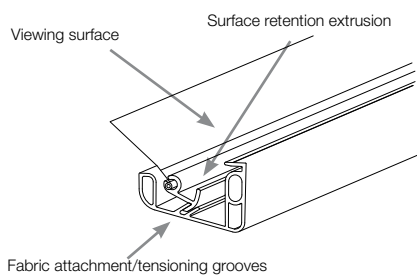


How to mount the screen




## BRACKET DIMENSIONS


Front view

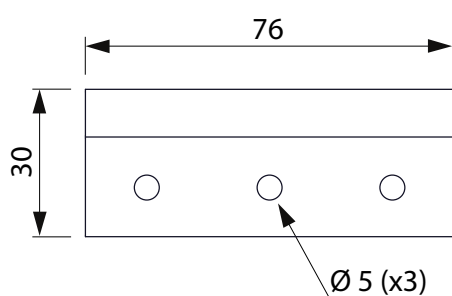

Side view



## PACKAGING DIMENSIONS

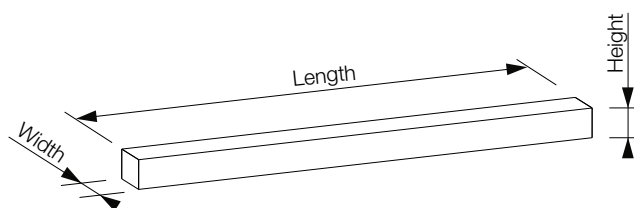

Screen width (viewing area)	Box length	Box width	Box height
1600	1860	165	170
1700	1960	165	170
1800	2060	165	170
1900	2160	165	170
2000	2260	165	170
2100	2360	165	170
2200	2460	165	170
2300	2560	165	170